



*hww* 2661-  
**PATENT APPLICATION**

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

*3*  
*2661*  
*890*

In re application of:

Ronald Maria Albert GEENS

Atty. Docket No.: Q64846

Appln. No.: 09/879,175

Group Art Unit: 2661

Confirmation No.: 3647

Examiner: Not Assigned

Filed: June 13, 2001

**RECEIVED**  
**AUG 15 2001**  
**Technology Center 2600**

For: COMMUNICATION STACK

**SUBMISSION OF PRIORITY DOCUMENT**


Commissioner for Patents  
Washington, D.C. 20231

Sir:

Submitted herewith is a certified copy of the priority document on which a claim to priority was made under 35 U.S.C. § 119. The Examiner is respectfully requested to acknowledge receipt of said priority document.

Respectfully submitted,

SUGHRUE, MION, ZINN,  
MACPEAK & SEAS, PLLC  
2100 Pennsylvania Avenue, N.W.  
Washington, D.C. 20037-3213  
Telephone: (202) 293-7060  
Facsimile: (202) 293-7860

  
Paul J. Wilson  
Registration No. 45,879  
for David J. Cushing  
Registration No. 28,703

Enclosures: Europe 00401763.8


Date: August 14, 2001

**THIS PAGE BLANK (USPTO)**

Ronald Maria Albert Beens  
09/879, 175



Europäisches  
Patentamt



European  
Patent Office

Office européen  
des brevets

Q64846  
1 of 1

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

00401763.8

RECEIVED

AUG 15 2001

Technology Center 2600

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

I.L.C. HATTEN-HECKMAN

DEN HAAG, DEN  
THE HAGUE,  
LA HAYE, LE

12/06/01



**THIS PAGE BLANK (USPTO)**



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

**Blatt 2 der Bescheinigung**  
**Sheet 2 of the certificate**  
**Page 2 de l'attestation**

Anmeldung Nr.:  
Application no.:  
Demande n°: 00401763.8

Anmeldetag:  
Date of filing:  
Date de dépôt: 20/06/00 ✓

Anmelder:  
Applicant(s):  
Demandeur(s):  
ALCATEL  
75008 Paris  
FRANCE

Bezeichnung der Erfindung:  
Title of the invention:  
Titre de l'invention:  
Data Communications Protocol stack

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:  
State:  
Pays:

Tag:  
Date:  
Date:

Aktenzeichen:  
File no.  
Numéro de dépôt:

Internationale Patentklassifikation:  
International Patent classification:  
Classification internationale des brevets:  
H04L29/06, H04L29/08

Am Anmeldetag benannte Vertragsstaaten:  
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/TR  
Etats contractants désignés lors du dépôt:

Bemerkungen:  
Remarks:  
Remarques:

**See for original title of the application**  
**page 1 of the description**

**THIS PAGE BLANK (USPTO)**

- 1 -

**COMMUNICATION STACK**

The present invention relates to a communications stack as described in the preamble of claim 1.

5           Such a communications stack is already known in the art, e.g. from "UNIX NETWORK PROGRAMMING " Volume 1 by W. Richard Stevens. More particularly, chapter 2 thereof describes that at a Unix process termination either voluntarily or involuntarily, all open descriptors are closed which will cause any TCP connection that is still open to be closed.

10           This means that, in case of an application crash, which is called an involuntarily application close, or a software upgrade which is called a voluntarily application close the connection between the two communicating applications is reset as a consequence. The situation wherein subsequently a group of network settings is reset as a result of the connection reset can be imagined. If, in case of  
15           such a involuntary application close, the application is restarted immediately after the close the connection between the communicating applications has to be re-established which is inefficient, for instance from a point of view of network load and/or processing load in re-connecting both applications.

          At this close an application communicating with a peer application,  
20           where the application or the peer application is closing or being closed, the connection between both applications is subsequently closed by means of closing the communication socket under control of at least one protocol message.

          An object of the present invention is to provide a communications stack of the above known type but wherein the efficiency of the connection  
25           management has improved.

          According to the invention, this object is achieved by the communication stack as defined in claim 1 and the communication network element as defined in claim 3.

          In this way, by delaying the resetting of a connection as consequence  
30           of an application that is closed voluntarily or involuntarily, the reset of the

- 2 -

connection between the two routers is delayed during a predetermined period of time. If before the expiry of the predetermined period of time a signal is received indicating the successful restart of the application, the connection is kept persistent. Hence, no connection reestablishment is necessary and consequently  
5 no network conditions updating is required. This results in a connection management with an improved efficiency.

Another characteristic feature of the present invention is described in claim 2.

The decision means additionally is adapted to change said delay  
10 based on the restart time of an application program. In this way the persistency of a connection is even better adapted to the application by configuring the delay-time dependent on the restart time of the application program. A small application program having a very short restart time, meaning that the connection resetting delay may be quite short to guarantee proper functioning.  
15 However, with respect to a larger application program, having a substantially larger restart time, the delay time needs to be substantially large in order not to let the delay time expire and as a consequence still reset the application program. Hence, by adapting the delay-time of the connection reset to the application program, the connection persistency is even better performed.

20 Another characteristic feature of the present invention is defined in claim 4.

The functionality of such a Communication Network Element can be performed by a Border Gateway Protocol Router (ROU).

The above and other objects and features of the invention will become  
25 more apparent and the invention itself will be best understood by referring to the following description of an embodiment taken in conjunction with the accompanying drawings wherein:

FIG. 1 represents a couple of communicating routers making part of an entire internet network; and



- 3 -

FIG. 2 represents the functional structure of the corresponding IP-communication stack COST1 of Router ROU1.

In the following paragraphs, referring to the drawings, an implementation of the present invention will be described. In the first part of this description the main elements of the network environment together with its  
5 interconnections, as presented in FIG. 1, are described.

Subsequently, the main elements of the router ROU1, as presented in FIG. 2, wherein the communication stack of the present invention is shown, are described. This part is succeeded by a description of all interconnections between  
10 each of the before mentioned main elements of router ROU1. Finally the execution of the implementation of the present invention is described.

It is assumed that the network environment of the present invention is an internet network comprising a plurality of routers connecting a plurality of user terminals. In order to keep simplicity in this description it is chosen to  
15 describe only two communicating routers thereof. This selection is sufficient to properly describe the principle of the present invention.

The main elements of the present embodiment, as presented in FIG. 1, are two routers ROU1, ROU2 more specifically internet protocol routers, further referred to as IP-routers. The IP-router handles the routing of IP-packets from one  
20 router to the subsequent one, based on an IP-address of the destination of the packet. Each of the routers contains a communication stack COST1, COST2, for management of a connection between two or more network elements or a part thereof, in this case between two IP-routers ROU1, ROU2. In its turn each communications stack COST1, COST2 comprises an IP-socket SOC1, SOC2  
25 each constituting a connection endpoint of the IP-link CON and configured to implement the connection persistency. For the proper execution of the present invention it is necessary to have at least the IP-socket SOC1 of router ROU1 configured for persistency.

The Router ROU1 as presented in FIG. 2 contains a router application  
30 RAP supporting the Border Gateway Protocol further referred to as BGP. Such a

- 4 -

BGP router application RAP is running on an operating system of each of these routers for enabling the routers to share routing information, based whereon the IP-packet routing is performed. The router ROU1 further contains an application crash signalling means ACSM that is adapted to detect that the router application  
5 RAP has crashed by means of polling and at detection of a crash to generate a signal indicating that the corresponding application, in this case, that the BGP router-application RAP has crashed. Additionally there is a respawning means RM that is adapted to generate a signal to restart the BGP router application RAP and additionally notify the signalling reception means SRM of the router ROU1  
10 that the BGP router application RAP has successfully restarted. Both the application crash signalling means ASCM and the respawning means RM form part of the operating system OS.

The communications stack COST1, as presented in FIG. 2, is built up of a signal reception means SRM that is adapted to receive signals used for  
15 managing the connection over the IP-link between two routers ROU1, ROU2, a decision means DM that is adapted to delay the resetting of the connection if the received signal is an application crash signal and subsequently to decide not to reset said connection if a subsequent signal is a successful application restart signal and this application restart signal is received before expiration of the  
20 delay. Additionally there is a connection persisting means CPM that is adapted to keep the connection persistent by simulating that the other side is still there. At last there is a connection resetting means CRM that is adapted to reset the connection over the IP-link between two routers by closing all in the connection involved elements. Additionally the connection resetting means is adapted to  
25 notify the connection persisting means to stop keeping the connection persistent.

The BGP router application RAP is at first coupled to an input/output-terminal I/O<sub>1</sub> of the communication stack COST1. The BGP router application RAP further has an output that is coupled to an input of the application crash signalling means ACSM. Third there is an output of the BGP router application  
30 RAP that is coupled to input I<sub>1</sub> of the communication stack COST1. The

- 5 -

respawning means RM in its turn has an output-terminal that is coupled to an input-terminal of the BGP router application RAP. The application crash signalling means ACSM further is coupled with an output terminal to an input-terminal I<sub>1</sub> of the communications-stack and is at the same time coupled with a  
5 second output to an input of the respawning means.

The signal reception means SRM has an input-terminal that is at the same time an input-terminal I<sub>1</sub> of the IP communication stack COST1. The signal reception means SRM on the other hand, is coupled with an output to an input of the decision means DM. The decision means DM in its turn is coupled with an  
10 output to an input of the connection resetting means CRM.

The connection resetting means CRM is coupled with an output to an input of IP socket SOC1. The IP socket SOC1 has an output-terminal O<sub>1</sub> that is at the same time an output of the communication stack COST1. The connection persisting means CPM in its turn, also has an output-terminal that is at the same  
15 time an input/output-terminal I/O<sub>1</sub> of the communication stack COST1. The connection resetting means CRM additionally has an output that is coupled to an input of the connection persisting means CPM. The connection persisting means CPM further has an input/output-terminal that is coupled to an input/output-terminal of the socket SOC1.

20 In order to explain the execution of the present invention it is assumed that the BGP router application RAP being executed by an operating system on router ROU1 closes involuntarily because of an application crash or voluntarily because of a software upgrade. The application crash signalling means ACSM detects the close of the BGP router application RAP and subsequently sends a  
25 connection terminated-signal to the signal reception means SRM of the communication stack COST1 and at the same time to the respawning means RM, forming part of the operating system OS, of the router application ROU1. The signal reception means SRM forwards the signal towards the decision means DM that, at reception of the connection terminated-signal delays the reset of the  
30 connection during a predetermined period of time by not forwarding the

- 6 -

connection terminated signal to the connection resetting means CRM during the delay-time.

5 In the mean time the respawning means RM of the router ROU1 has received a signal indicating that the BGP router application RAP has crashed and is to be restarted. Therefore, the respawning means RM, will initiate the restart of the BGP router application RAP of ROU1 and after a successful restart thereof, this router application RAP sends a signal indicating that the router application RAP has successfully restarted to the signal reception means SRM of the communication stack COST1. Subsequently, the signal reception means SRM  
10 forwards the received signal towards the decision means DM that in its turn decides not to reset the connection at reception of the respawn-signal which is accomplished by not at all activating the connection resetting means CRM and hence leaving the connection persisting means CPM ignorant about the application crash. This is only the case if this respawn-signal is received at the  
15 decision means before expiry of the delayed resetting of the connection. Thus, the connection persisting means CPM keeps notifying the peer router ROU1 of normal functioning of the connection. In the mean time the BGP router application performed the restart without affecting any other network element and corresponding settings.

20 In this way, at an application crash the connection is kept up. Hence all BGP routing tables need not be adapted for the reset connection and subsequently again for a newly established connection.

Although the above embodiments of the invention have been described by means of functional blocks, their detailed realisation based on their  
25 functional description should be obvious for a person skilled in the art and is therefore not described.

While the principles of the invention have been described above in connection with specific apparatus, it is to be clearly understood that this description is made only by way of example and not as a limitation on the scope  
30 of the invention, as defined in the appended claims.

- 7 -

The application of the present invention is not restricted to this embodiment wherein the present invention is implemented in a set of routers but may also applied in other network elements.

5

**THIS PAGE BLANK (USPTO)**

- 8 -

**CLAIMS**

1. Communications stack (COST1), for connection management, to be used in a communications system comprising at least two communicating application programs, said application programs each communicating over a connection (CON) via said communications stack (COST1), said communications stack (COST1) comprising the following means:

a. connection resetting means (CRM), adapted to reset said connection by closing all connection involved elements; and

b. signal reception means (SRM), adapted to receive at least one signal for managing said connection (CON),

c. connection persisting means (CPM), coupled with an input to an output of said connection resetting means (CRM) and adapted to keep said connection persistent, **CHARACTERISED IN THAT** said communications stack further (COST1) comprises the following means:

d. decision means (DM), coupled with an input to an output of said signal reception means (SRM) and with an output to an input of said connection resetting means (CRM) and adapted to delay said reset of said connection if said at least one signal is a terminated application signal and subsequently decide to persist said connection if a further said at least one signal is a successful application restart signal and said application restart signal is received before expiration of said delay.

2. Communications stack (COST1) according to claim 1, **CHARACTERISED IN THAT** said decision means (DM) additionally is adapted to change said delay based on a restart time of said application program.

3. Communication Network Element including a communication stack (COST1) as claimed in claim 1 or claim 2.

30

- 9 -

4. Communication Network Element according to claim 3,  
**CHARACTERISED IN THAT** said Communication Network Element is a Border  
Gateway Protocol Router (ROU).

5



- 10-

**ABSTRACT**  
**COMMUNICATION STACK**

5       The present invention relates to a communications stack, for  
connection management in a communications system. The communications  
system consists of at least two communicating application programs. Both  
application programs communicate over a connection via the communications  
stack.

10       The communication stack comprises a connection resetting means that  
is adapted to reset the connection by closing all connection involved elements, a  
signal reception means that is able to receive at least one signal for managing  
said connection and a connection persisting means that is adapted to keep the  
connection persistent. The communications stack additionally contains a decision  
15       means that is adapted to delay the reset of the connection if a terminated  
application signal is received via the signal reception means. If the  
communication stack subsequently, via the signal reception means, receives a  
successful application restart signal, the decision means decides to persist the  
connection if the application restart signal is received before expiration of said  
20       delay.

20

**THIS PAGE BLANK (USE)**

1/2

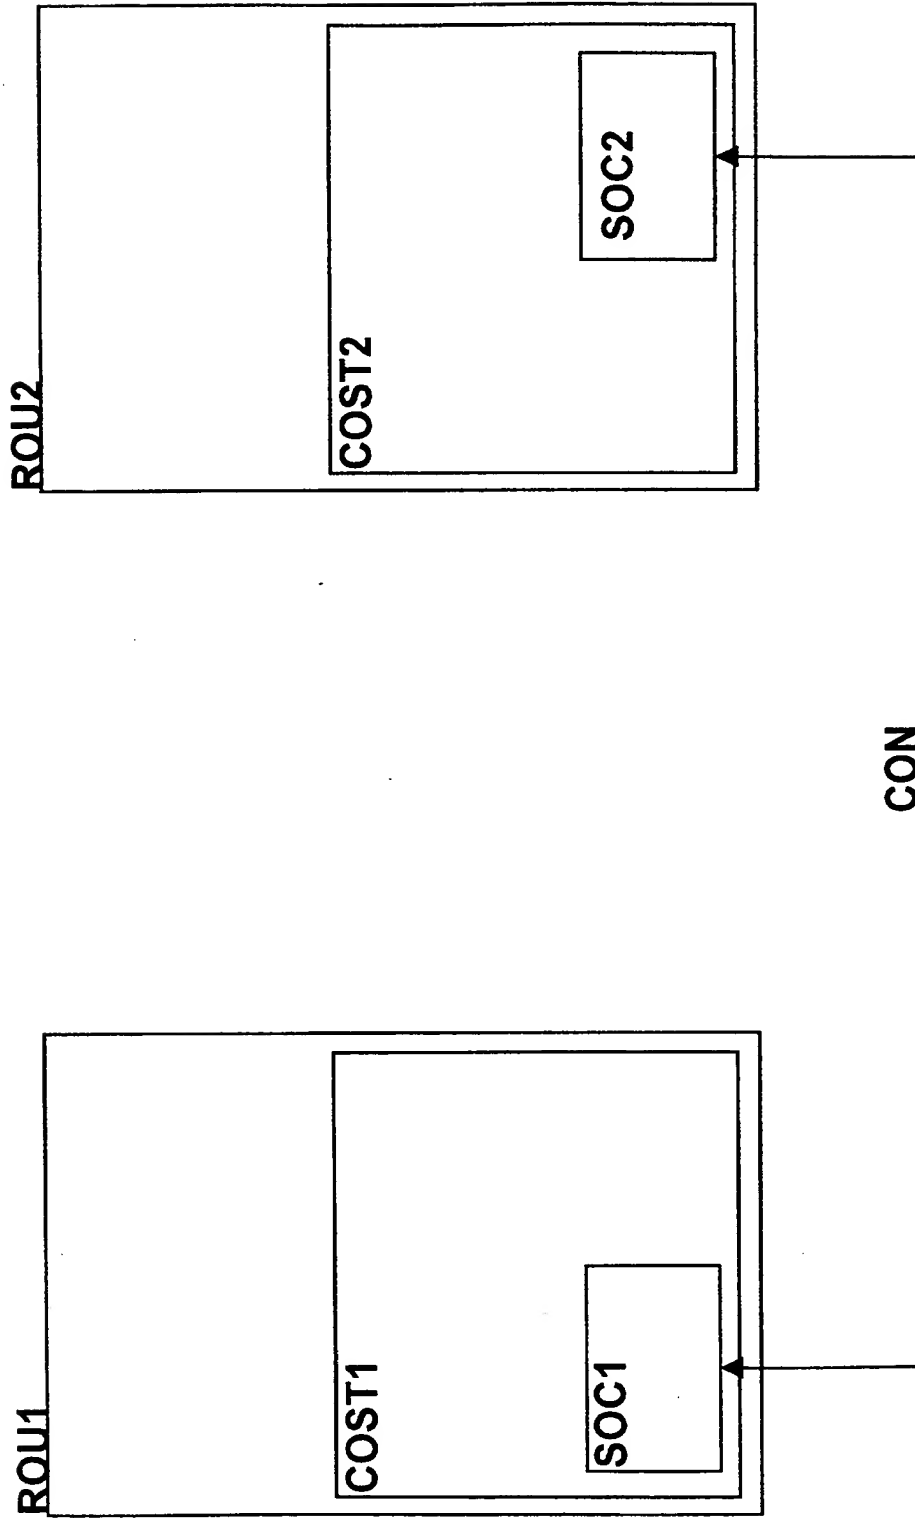


FIG. 1

2/2

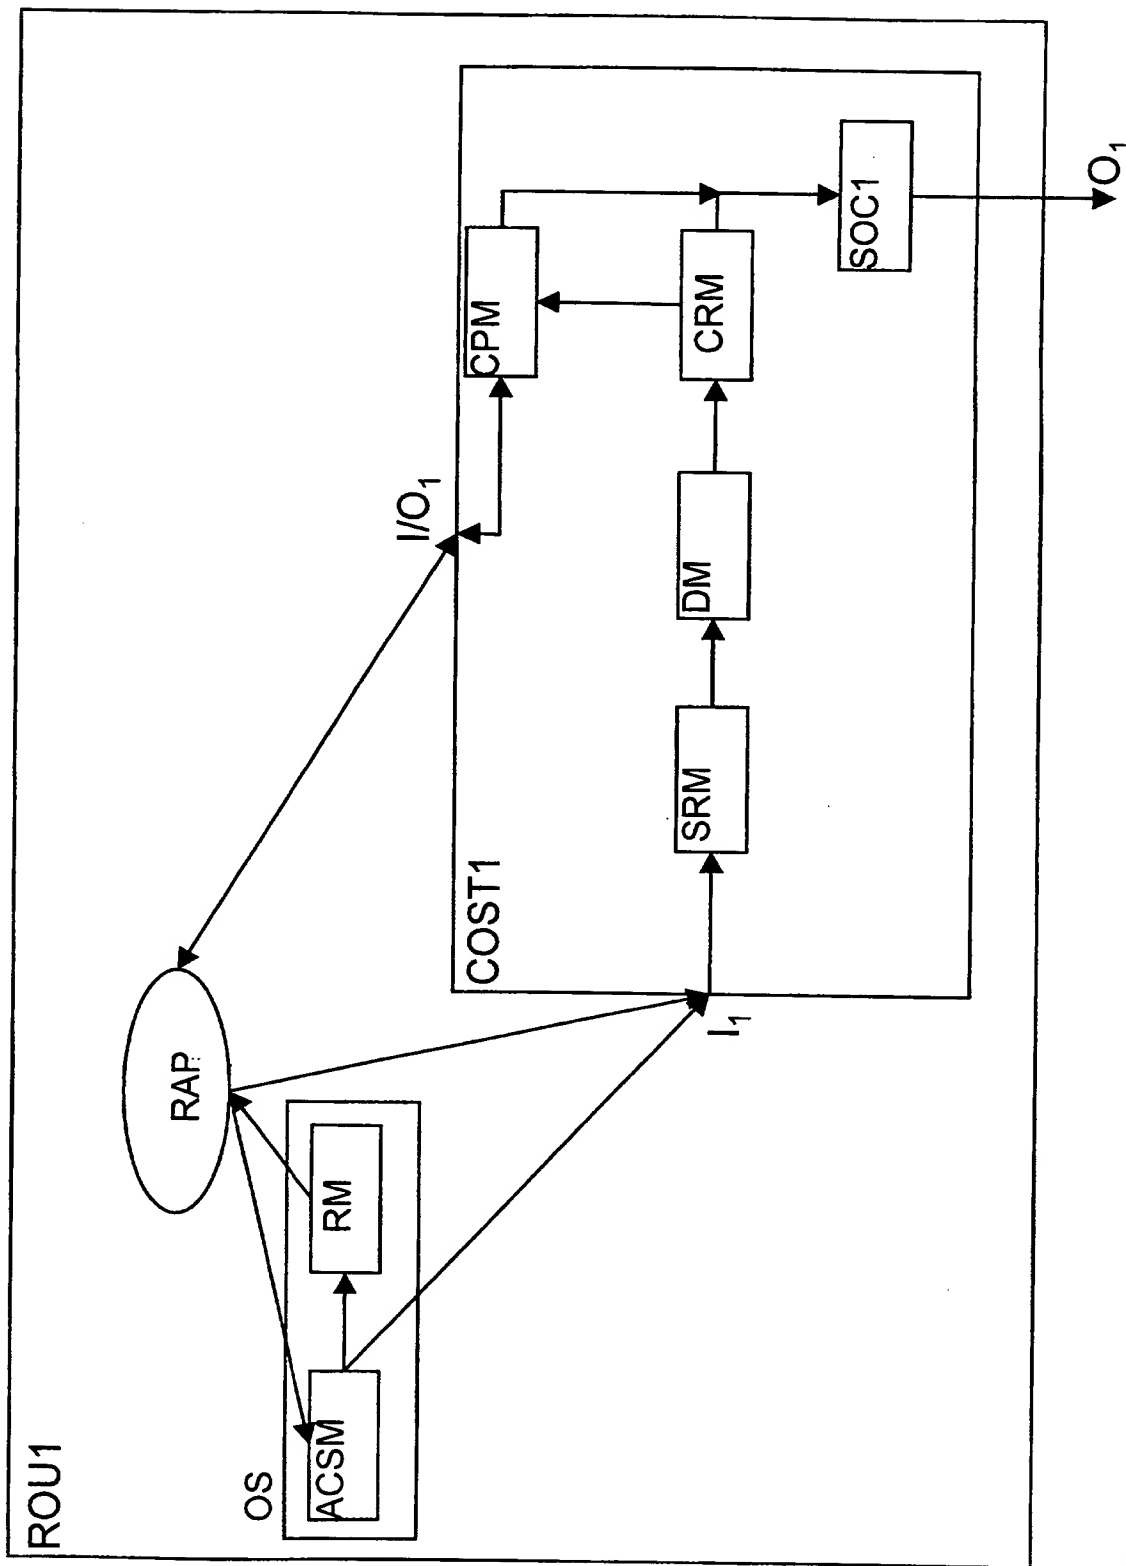


FIG. 2